

BBS220 RETRO - Solid Doors

On the inside, a modern professional refrigeration system with the latest energy-efficient features and perfect temperature control. On the outside, vintage retro styling that makes a striking focal point of any bar. It's cutting edge technology perfectly combined with classic vintage looks.

Like every Precision product, the Retro range boasts a host of features that are either aesthetically stunning, hugely practical, or both.

Give us a RAL number and we'll paint your retro refrigerator to match any colour you can dream of.

Key Features:

Stainless Steel Interior & Exterior (Mirror)

Built-In Air Duct For Even Temperature Distribution

R134a Refrigerant

Zero ODP Injected Polyurethane Insulation - 60mm

+3 / 15°C Refrigerator Temperature Range

Electronic Controller With LED Display Discreetly Positioned Inside The Cabinet For Ease Of Access

Automatic Defrost

Rifle Bore Coated Evaporators

Retro Styled Ultra Heavy Duty Chrome Handles & Hinges

LED Interior Lighting


Adjustable Perforated Stainless Steel Shelves

Hi / Lo Audio Visual Temperature Alarms

Condensing Unit Safety System To Protect Compressor From Blocked Condensers



Retro Back Bar Handle



Retro Back Bar Hinge

Options:


Glass Doors - Clear Glass

Glass Doors - Reeded Glass

Exterior Painted To Any RAL Colour

Precision Connect



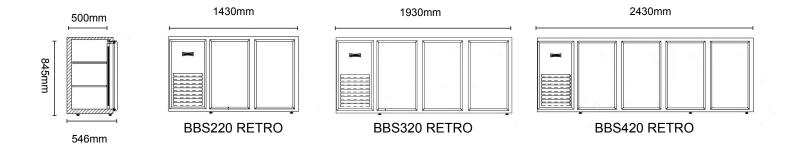

Model	BBS220 RETRO	BBS320 RETRO	BBS420 RETRO
Туре	Refrigerator	Refrigerator	Refrigerator
Material	ST/ST Int/Ext (mirror)	ST/ST Int/Ext (mirror)	ST/ST Int/Ext (mirror)
Shelf Size	426x369	454x369	465 x 369
Number of Shelves	4	6	8
Temperature Range	+3/15°C	+3/15°C	+3/15°C
Exterior WxDxH (mm)	1430x546x845	1930x546x845	2430x546x845
Refrigerant / GWP	R134a / 1430	R134a / 1430	R134a/1430
Refrigeration Watts (+45°C Condensing)	560	560	560
Evaporating Temp	-5°C	-5°C	-5°C
Power	230 / 50 / 1	230 / 50 / 1	230 / 50 / 1
Energy Consumption / 24hrs - kWh**	N/A	N/A	N/A
Energy Consumption / Year (AEC) - kWh**	N/A	N/A	N/A
Energy Efficiency Class**	N/A	N/A	N/A

^{*} Heat Rejection is taken at the listed evaporating and condensing condition. Watts is calculated by taking the total power of the cabinet. ** Tested to EN16825

We are constantly innovating and improving our products. Please always check our website for the most up-to-date version of this spec sheet